

DATE '10 23 03
 STD. DRW. NO. 2

DECORATIVE STREET LIGHT STANDARD



- KEY:
- Ⓞ CABLE OPENING IN
 BASE 2" X 12"
 - @ HAND HOLE OPENING
 IN POLE = 3" X 4 1/4 X 7"
 - Ⓢ PHOTO ELECTRIC
 CELL RECEPTACLE
 - @ 5/8" X 8' GROUND ROD
 - Ⓡ TWO PIECE FIBERGLASS
 BASE COVER

RECOMMENDED FIXTURE - ANTIQUE
 DLT30S/BK-S70/QVIII-TLP
 OR APPROVED EQUIVALENT


WHATELY LAMP POST-
 MADISON SERIES 305 DIRECT
 BURIED POLE WITH 12' MOUNTING
 HEIGHT OR APPROVED EQUIVALENT

BLACK FINISH

CABLE: 2 CONDUCTOR 10 A.W.G. COPPER
 UF, 600 VOLTS WITH #10 BARE GROUND
 TO BE TRENCHED TO THE CLOSEST
 PEDESTAL OR TRANSFORMER.

VOLTAGE: 120 OR 240V (RESIDENTIAL)
 120, 208, 240, 277V (COMMERCIAL)
 <TO BE DETERMINED BY ENGINEERING)

PROPERTY
 LINE

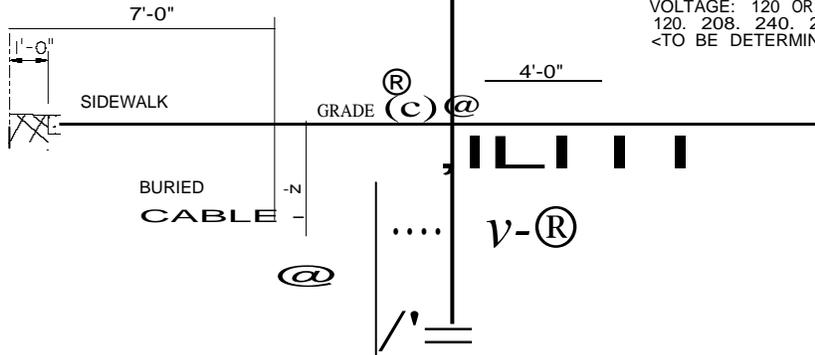

BACKFILL POLE HOLE WITH CA6
 OR COMPACTED GRAVEL.

CITY OF ST. CHARLES

FILE: ELE\DETAIL\LITEF\1\LE.DGN

12.30.05(L)

(Ord. 2003-M-98 § 1; Ord. 1998-M-39 § 1; Ord. 1998-M-23 § 1.)